

Base Plate Connector Clamps

Stainless Steel

SPECIFICATION

Types

- Type **A**: Without seals
- Type **B**: With seals

Identification no.

- No. **4**: With stainless steel cap nut DIN 917

Stainless steel AISI CF-8

Matte shot-blasted

Carriage bolt DIN 603

Stainless steel

Cap nuts DIN 917 / washers

Stainless steel

Seals

- Sealing disks
Plastic (Polyacetal POM)
- Spacer ring
Silicon, 40 ... 60 Shore A



INFORMATION

The clamping bores of base plate connector clamps GN 163.5 are mechanically machined and designed for construction tubes GN 990 (see page 1902) or DIN 2391, DIN 2395 and DIN 2462.

At the screw location **z**, the carriage bolt and the cap nut reduce the bore cross-section for clamping. Type B is equipped with seals at the screw location.


For clamping without tools, the cap nut can be replaced by an adjustable hand lever GN 911.3 (see page 1875) listed in the table as accessory.

ACCESSORY

- Adjustable Hand Levers GN 911.3 (see page 1875)

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

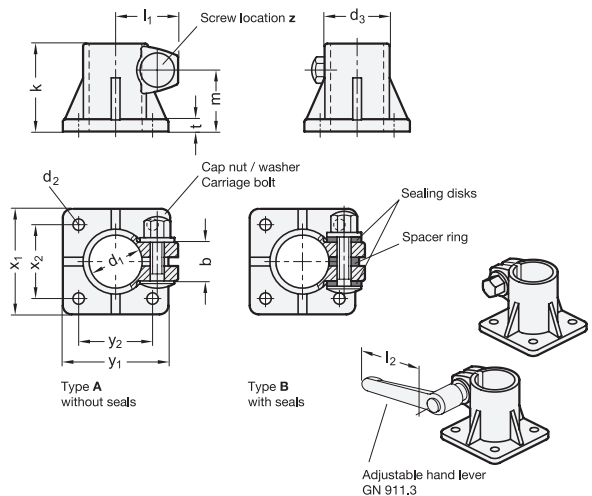

GN 163.5-A

STAINLESS STEEL

Description	d_1 Bore	b	d_2	d_3	k Clamping length	l_1	m	t	x_1	x_2	y_1	y_2	z Screw location	Accessory Recom. hand lever GN 911.3 for z I2	⚖
GN 163.5-B30-A-4	B 30	22	6.5	37	50	36	35	6.5	60	42	60	42	M 8	63 78	265
GN 163.5-B50-A-4	B 50	30	10.7	60	85	48.5	60	9	105	74	105	74	M 10	78 92	305

GN 163.5-B

STAINLESS STEEL

Description	d_1 Bore	b	d_2	d_3	k Clamping length	l_1	m	t	x_1	x_2	y_1	y_2	z Screw location	Accessory Recom. hand lever GN 911.3 for z I2	⚖
GN 163.5-B30-B-4	B 30	22	6.5	37	50	36	35	6.5	60	42	60	42	M 8	63 78	265
GN 163.5-B50-B-4	B 50	30	10.7	60	85	48.5	60	9	105	74	105	74	M 10	78 92	305