

Bull's Eye Spirit Levels

Housing Aluminum, for Insertion into Bore Holes

SPECIFICATION

Sensitivity

- 30 Angle minutes, bubble move by 2 mm

Housing

Aluminum

- Anodized, natural color **ALN**
- Anodized, black **ALS**

Spirit level element

- Glass plastic body
- Filling
Colorless-transparent **K**

Casting compound

Mineral-based

INFORMATION

Bull's eye spirit levels GN 2278 are used to check the horizontal position of jigs, machines, devices, appliances and instruments.

The housing is grooved at its lower diameter d_3 , making it easier to mount in place, e.g. by gluing.


The spirit levels are aligned in relation to the reference or contact surface, so that the bubble is located inside the marking ring once the horizontal position of the contact surface is reached.

ON REQUEST

- Filling, green-transparent
- Other sensitivities
- Housing in brass or stainless steel

TECHNICAL INFORMATION

- General Information on Bull's Eye, Screw-On and Cross Spirit Levels (see page 678)

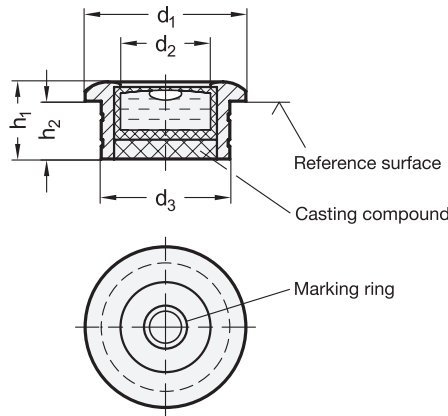

GN 2278

Description	d_1	d_2	$d_3 - 0.2$	h_1	h_2	
GN 2278-ALN-20-K-30	20	12	18	10	8	4
GN 2278-ALN-25-K-30	25	14	20	12	9	4
GN 2278-ALN-30-K-30	30	20	28	13	10	7
GN 2278-ALS-20-K-30	20	12	18	10	8	4
GN 2278-ALS-25-K-30	25	14	20	12	9	4
GN 2278-ALS-30-K-30	30	20	28	13	10	7