

Blanking plugs

SPECIFICATION

Types

- Type **A**: without thread coating
- Type **PRB**: with thread coating (polyamide allround coating)

Steel

- Tensile strength class 5.8
- blackened

INFORMATION

The thread locking PRB (polyamide allround coating) is a clamping lock which prevents the locking screw from being inadvertently being loosened and becoming detached.

Stainless Steel-Blanking plugs

SPECIFICATION

Types

- Type **A**: without thread coating
- Type **PRB**: with thread coating (polyamide allround coating)



Stainless Steel AISI 303

INFORMATION


The thread locking PRB (polyamide allround coating) is a clamping lock which prevents the locking screw from being inadvertently being loosened and becoming detached.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)

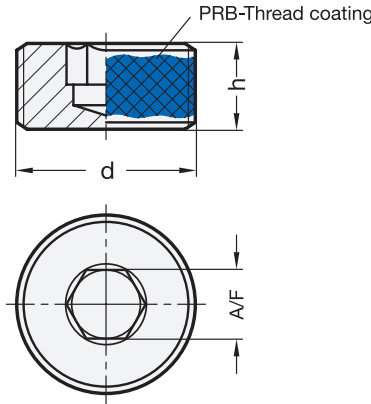

Example for application



GN 252

Description	d	h	A/F	⚖️
GN 252-M12x1,5-A	M 12 x 1.5	10	6	6
GN 252-M16x1,5-A	M 16 x 1.5	10	8	14
GN 252-M20x1,5-A	M 20 x 1.5	12	10	20
GN 252-M24x1,5-A	M 24 x 1.5	12	14	24
GN 252-M27x1,5-A	M 27 x 1.5	12	14	36
GN 252-M30x1,5-A	M 30 x 1.5	12	17	44
GN 252-M33x1,5-A	M 33 x 1.5	12	17	56
GN 252-M12x1,5-PRB	M 12 x 1.5	10	6	6
GN 252-M16x1,5-PRB	M 16 x 1.5	10	8	10
GN 252-M20x1,5-PRB	M 20 x 1.5	12	10	20
GN 252-M24x1,5-PRB	M 24 x 1.5	12	14	24
GN 252-M27x1,5-PRB	M 27 x 1.5	12	14	36
GN 252-M30x1,5-PRB	M 30 x 1.5	12	17	44
GN 252-M33x1,5-PRB	M 33 x 1.5	12	17	56

GN 252.5

STAINLESS STEEL

Description	d	h	A/F	⚖️
GN 252.5-M12x1,5-A	M12x1.5	10	6	5
GN 252.5-M16x1,5-A	M16x1.5	10	8	10
GN 252.5-M20x1,5-A	M20x1.5	12	10	20
GN 252.5-M24x1,5-A	M24x1.5	12	14	26
GN 252.5-M27x1,5-A	M27x1.5	12	14	26
GN 252.5-M12x1,5-PRB	M12x1.5	10	6	6
GN 252.5-M16x1,5-PRB	M16x1.5	10	8	10
GN 252.5-M20x1,5-PRB	M20x1.5	12	10	26
GN 252.5-M24x1,5-PRB	M24x1.5	12	14	30
GN 252.5-M27x1,5-PRB	M27x1.5	12	14	36