

Adjustable hand levers

with push button / Zinc die casting, Bushing /
Threaded bolt Steel

SPECIFICATION

Handle

Zinc die casting

plastic coated
black, RAL 9005

textured finish **SW**

Releasing button

Plastic

black, RAL 9005 **S**

orange, RAL 2004 **O**

grey, RAL 7035 **G**

Pin for releasing button

Stainless Steel

Version with bushing

Steel, blackened

Version with threaded stud

Steel, blackened

ON REQUEST

Adjustable hand levers GN 303 are ideal whenever parts have to be clamped in a confined space or in a particular lever position. The centre insert is connected to the lever via serrations which can easily be dis-engaged.


The releasing button is a design element that offers an easy disengagement. Its use is limited to applications where dismantling of the lever for installation is not required.

ON REQUEST

- Handle in colours of GN 300 (see page 320)

TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)

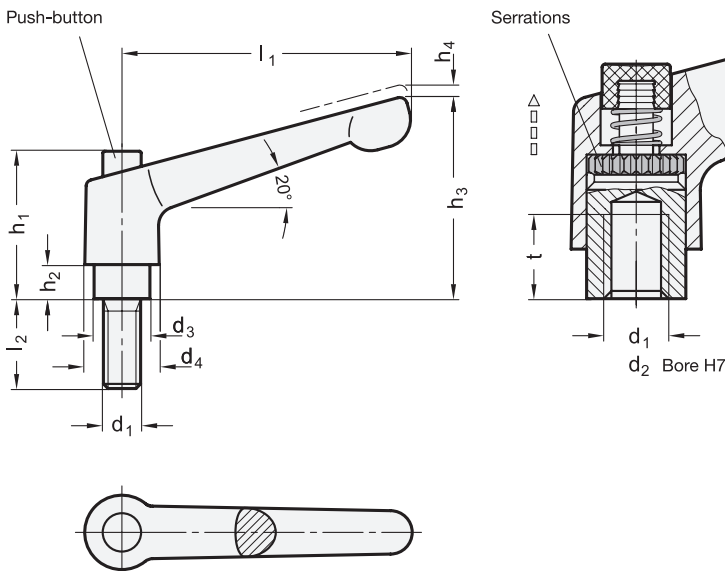

* Complete with colour index of the Push button (S, O or G)



GN 303-with bushing

Description	l1	d1	d2 H7	d3	d4	h1	h2	h3	h4	t min.	
GN 303-30-B5-SW-*	30	-	B 5	10	13	26.5	4	31	3.5	9	26
GN 303-30-B6-SW-*	30	-	B 6	10	13	26.5	4	31	3.5	9	26
GN 303-30-M3-SW-*	30	M 3	-	10	13	26.5	4	31	3.5	7	26
GN 303-30-M4-SW-*	30	M 4	-	10	13	26.5	4	31	3.5	9	26
GN 303-30-M5-SW-*	30	M 5	-	10	13	26.5	4	31	3.5	9	26
GN 303-30-M6-SW-*	30	M 6	-	10	13	26.5	4	31	3.5	9	25
GN 303-45-B5-SW-*	45	-	B 5	10	13	26.5	4	35	3.5	9	32
GN 303-45-B6-SW-*	45	-	B 6	10	13	26.5	4	35	3.5	9	32
GN 303-45-M4-SW-*	45	M 4	-	10	13	26.5	4	35	3.5	9	32
GN 303-45-M5-SW-*	45	M 5	-	10	13	26.5	4	35	3.5	9	32
GN 303-45-M6-SW-*	45	M 6	-	10	13	26.5	4	35	3.5	9	32
GN 303-63-B8-SW-*	63	-	B 8	13.5	17.5	32.5	6.5	45	4	11	72
GN 303-63-M6-SW-*	63	M 6	-	13.5	17.5	32.5	6.5	45	4	11	75
GN 303-63-M8-SW-*	63	M 8	-	13.5	17.5	32.5	6.5	45	4	11	72
GN 303-78-B8-SW-*	78	-	B 8	16	21	37.5	8	55	4	14	119
GN 303-78-B10-SW-*	78	-	B 10	16	21	37.5	8	55	4	14	115
GN 303-78-M8-SW-*	78	M 8	-	16	21	37.5	8	55	4	14	120
GN 303-78-M10-SW-*	78	M 10	-	16	21	37.5	8	55	4	14	118

GN 303-with threaded stud

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4	
GN 303-30-M3-6-SW-*	30	M 3	6	10	13	26.5	4	31	3.5	27
GN 303-30-M3-8-SW-*	30	M 3	8	10	13	26.5	4	31	3.5	27
GN 303-30-M3-10-SW-*	30	M 3	10	10	13	26.5	4	31	3.5	27
GN 303-30-M3-12-SW-*	30	M 3	12	10	13	26.5	4	31	3.5	28
GN 303-30-M3-16-SW-*	30	M 3	16	10	13	26.5	4	31	3.5	28
GN 303-30-M4-12-SW-*	30	M 4	12	10	13	26.5	4	31	3.5	28
GN 303-30-M4-16-SW-*	30	M 4	16	10	13	26.5	4	31	3.5	28
GN 303-30-M4-20-SW-*	30	M 4	20	10	13	26.5	4	31	3.5	28
GN 303-30-M4-25-SW-*	30	M 4	25	10	13	26.5	4	31	3.5	29
GN 303-30-M4-32-SW-*	30	M 4	32	10	13	26.5	4	31	3.5	29
GN 303-30-M5-12-SW-*	30	M 5	12	10	13	26.5	4	31	3.5	29
GN 303-30-M5-16-SW-*	30	M 5	16	10	13	26.5	4	31	3.5	29
GN 303-30-M5-20-SW-*	30	M 5	20	10	13	26.5	4	31	3.5	29
GN 303-30-M5-25-SW-*	30	M 5	25	10	13	26.5	4	31	3.5	30
GN 303-30-M5-32-SW-*	30	M 5	32	10	13	26.5	4	31	3.5	31
GN 303-30-M5-40-SW-*	30	M 5	40	10	13	26.5	4	31	3.5	33
GN 303-30-M5-50-SW-*	30	M 5	50	10	13	26.5	4	31	3.5	33
GN 303-30-M6-12-SW-*	30	M 6	12	10	13	26.5	4	31	3.5	37
GN 303-30-M6-16-SW-*	30	M 6	16	10	13	26.5	4	31	3.5	38
GN 303-30-M6-20-SW-*	30	M 6	20	10	13	26.5	4	31	3.5	39
GN 303-30-M6-25-SW-*	30	M 6	25	10	13	26.5	4	31	3.5	40
GN 303-30-M6-32-SW-*	30	M 6	32	10	13	26.5	4	31	3.5	41
GN 303-30-M6-40-SW-*	30	M 6	40	10	13	26.5	4	31	3.5	42
GN 303-30-M6-50-SW-*	30	M 6	50	10	13	26.5	4	31	3.5	42
GN 303-45-M4-12-SW-*	45	M 4	12	10	13	26.5	4	35	3.5	35
GN 303-45-M4-16-SW-*	45	M 4	16	10	13	26.5	4	35	3.5	35
GN 303-45-M4-20-SW-*	45	M 4	20	10	13	26.5	4	35	3.5	35
GN 303-45-M4-25-SW-*	45	M 4	25	10	13	26.5	4	35	3.5	36
GN 303-45-M4-32-SW-*	45	M 4	32	10	13	26.5	4	35	3.5	36
GN 303-45-M5-12-SW-*	45	M 5	12	10	13	26.5	4	35	3.5	35
GN 303-45-M5-16-SW-*	45	M 5	16	10	13	26.5	4	35	3.5	36
GN 303-45-M5-20-SW-*	45	M 5	20	10	13	26.5	4	35	3.5	36
GN 303-45-M5-25-SW-*	45	M 5	25	10	13	26.5	4	35	3.5	37



* Complete with colour index of the Push button (S, O or G)

S
RAL9005

O
RAL2004

G
RAL 7035

GN 303-with threaded stud

Description	l1	d1	l2	d3	d4	h1	h2	h3	h4	⚖
GN 303-45-M5-32-SW-*	45	M 5	32	10	13	26.5	4	35	3.5	38
GN 303-45-M5-40-SW-*	45	M 5	40	10	13	26.5	4	35	3.5	39
GN 303-45-M5-50-SW-*	45	M 5	50	10	13	26.5	4	35	3.5	40
GN 303-45-M6-12-SW-*	45	M 6	12	10	13	26.5	4	35	3.5	36
GN 303-45-M6-16-SW-*	45	M 6	16	10	13	26.5	4	35	3.5	37
GN 303-45-M6-20-SW-*	45	M 6	20	10	13	26.5	4	35	3.5	37
GN 303-45-M6-25-SW-*	45	M 6	25	10	13	26.5	4	35	3.5	38
GN 303-45-M6-32-SW-*	45	M 6	32	10	13	26.5	4	35	3.5	40
GN 303-45-M6-40-SW-*	45	M 6	40	10	13	26.5	4	35	3.5	41
GN 303-45-M6-50-SW-*	45	M 6	50	10	13	26.5	4	35	3.5	42
GN 303-63-M6-12-SW-*	63	M 6	12	13.5	17.5	32.5	6.5	45	4	80
GN 303-63-M6-16-SW-*	63	M 6	16	13.5	17.5	32.5	6.5	45	4	80
GN 303-63-M6-20-SW-*	63	M 6	20	13.5	17.5	32.5	6.5	45	4	80
GN 303-63-M6-25-SW-*	63	M 6	25	13.5	17.5	32.5	6.5	45	4	82
GN 303-63-M6-32-SW-*	63	M 6	32	13.5	17.5	32.5	6.5	45	4	82
GN 303-63-M6-40-SW-*	63	M 6	40	13.5	17.5	32.5	6.5	45	4	84
GN 303-63-M6-50-SW-*	63	M 6	50	13.5	17.5	32.5	6.5	45	4	85
GN 303-63-M6-63-SW-*	63	M 6	63	13.5	17.5	32.5	6.5	45	4	87
GN 303-63-M8-12-SW-*	63	M 8	12	13.5	17.5	32.5	6.5	45	4	81
GN 303-63-M8-16-SW-*	63	M 8	16	13.5	17.5	32.5	6.5	45	4	82
GN 303-63-M8-20-SW-*	63	M 8	20	13.5	17.5	32.5	6.5	45	4	75
GN 303-63-M8-25-SW-*	63	M 8	25	13.5	17.5	32.5	6.5	45	4	85
GN 303-63-M8-32-SW-*	63	M 8	32	13.5	17.5	32.5	6.5	45	4	87
GN 303-63-M8-40-SW-*	63	M 8	40	13.5	17.5	32.5	6.5	45	4	89
GN 303-63-M8-50-SW-*	63	M 8	50	13.5	17.5	32.5	6.5	45	4	93
GN 303-63-M8-63-SW-*	63	M 8	63	13.5	17.5	32.5	6.5	45	4	96
GN 303-63-M10-20-SW-*	63	M 10	20	13.5	17.5	32.5	6.5	45	4	87
GN 303-63-M10-25-SW-*	63	M 10	25	13.5	17.5	32.5	6.5	45	4	89
GN 303-63-M10-32-SW-*	63	M 10	32	13.5	17.5	32.5	6.5	45	4	92
GN 303-63-M10-40-SW-*	63	M 10	40	13.5	17.5	32.5	6.5	45	4	97
GN 303-63-M10-50-SW-*	63	M 10	50	13.5	17.5	32.5	6.5	45	4	102
GN 303-63-M10-63-SW-*	63	M 10	63	13.5	17.5	32.5	6.5	45	4	108
GN 303-63-M10-80-SW-*	63	M 10	80	13.5	17.5	32.5	6.5	45	4	117
GN 303-78-M8-16-SW-*	78	M 8	16	16	21	37.5	8	55	4	122
GN 303-78-M8-20-SW-*	78	M 8	20	16	21	37.5	8	55	4	122
GN 303-78-M8-25-SW-*	78	M 8	25	16	21	37.5	8	55	4	124
GN 303-78-M8-32-SW-*	78	M 8	32	16	21	37.5	8	55	4	127
GN 303-78-M8-40-SW-*	78	M 8	40	16	21	37.5	8	55	4	131
GN 303-78-M8-50-SW-*	78	M 8	50	16	21	37.5	8	55	4	134
GN 303-78-M8-63-SW-*	78	M 8	63	16	21	37.5	8	55	4	140
GN 303-78-M8-80-SW-*	78	M 8	80	16	21	37.5	8	55	4	143
GN 303-78-M10-16-SW-*	78	M 10	16	16	21	37.5	8	55	4	133
GN 303-78-M10-20-SW-*	78	M 10	20	16	21	37.5	8	55	4	135
GN 303-78-M10-25-SW-*	78	M 10	25	16	21	37.5	8	55	4	138
GN 303-78-M10-32-SW-*	78	M 10	32	16	21	37.5	8	55	4	141
GN 303-78-M10-40-SW-*	78	M 10	40	16	21	37.5	8	55	4	152
GN 303-78-M10-50-SW-*	78	M 10	50	16	21	37.5	8	55	4	152
GN 303-78-M10-63-SW-*	78	M 10	63	16	21	37.5	8	55	4	158
GN 303-78-M10-80-SW-*	78	M 10	80	16	21	37.5	8	55	4	166
GN 303-78-M12-25-SW-*	78	M 12	25	16	21	37.5	8	55	4	143
GN 303-78-M12-32-SW-*	78	M 12	32	16	21	37.5	8	55	4	148
GN 303-78-M12-40-SW-*	78	M 12	40	16	21	37.5	8	55	4	155
GN 303-78-M12-50-SW-*	78	M 12	50	16	21	37.5	8	55	4	169
GN 303-78-M12-63-SW-*	78	M 12	63	16	21	37.5	8	55	4	171
GN 303-78-M12-80-SW-*	78	M 12	80	16	21	37.5	8	55	4	174