

Snap Locks

Locking Distance A1 / A2 Adjustable

SPECIFICATION

- 1 Housing
- 2 Zinc die casting
- 3 - Corrosion-resistant
- 4 ZNDG Pass. nano®-coating
- 5 - Anthracite colored
- 6 Setting sleeve
- 7 Steel
- 8 Powder coated
- 9 Black, matte textured finish
- 10 Operating button / Slide
- 11 Plastic (Polyamide PA)
- 12 Black, matte finish
- 13 Push button
- 14 Plastic (Polyamide PA)
- 15 Light gray
- 16 Hex nut
- 17 Steel
- 18 Zinc plated, blue passivated





INFORMATION

Snap locks GN 315 are characterized by a radial, spring-loaded slide causing the locking action. When closing the door, the locking action sets in automatically. The bevelled slide is first pushed back via an appropriately arranged lug and then moved into the locking position by the pressure spring. The door is unlocked via the push button. To operate the door, these snap locks are fitted with an operating button.

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)

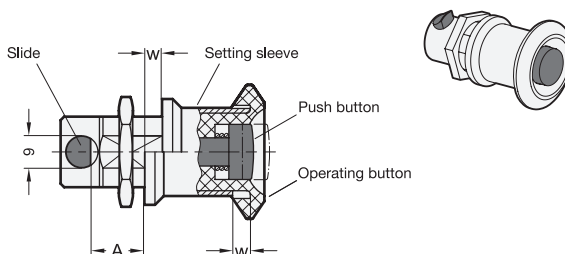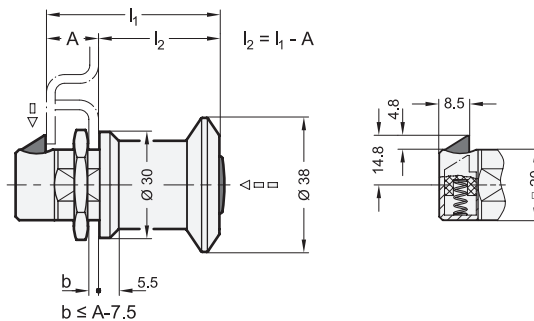

GN 315

Description	Locking distance Nominal size	A min.	l ₁	w Adjustable range	⚖
GN 315-A1	A 1	18	52	5	100
GN 315-A2	A 2	23	57	5	138



Construction and assembly instruction

These snap locks can be used to latch a door, cover or hatch but not to clamp it.

This is why it is important to position the locking distance A (door + door frame thickness) with great accuracy and precision.

For snap locks GN 315, the locking distance can be set continuously via the setting sleeve adjustable via a precision thread. This makes installation a great deal easier.

For installation, set a hole in the door, cover or hatch as shown in the outline drawing.


The snap lock is inserted through the hole from the front. The mounting nut is then simply pushed onto the slide from the back side and screwed into place.

The required installation bore in the door leaf, is usually generated by punching or laser machining in series production.


The installation bore diameter can also be created by drilling or milling as shown in the outline drawings.

For small series and steel sheets below 2 mm thickness, the sheet metal punches GN 123 (see page 1493) are the tool of choice.

Hole distance

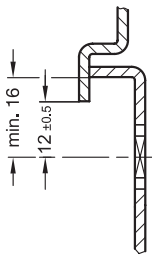

Installation hole for punching or laser machining



Installation hole for drilling or milling

