

Cranks

Steel

SPECIFICATION

Types

- Type **A**: without slot
- Type **N**: with slot

Steel

- shot-blasted and nickel plated
- Crank butt-welded

Plastic cap
black

Cylindrical Revolving handles GN 598 (see page 573)

Plastic, Duroplast
black, shiny finish

INFORMATION


Cranks GN 369 are for light duty applications and are of extremely good value.

A suitable dowel in the shaft and the slot in the handle provides a cheap connection to the shaft. To secure the handle permanently to the shaft, remove the plastic cap and insert screw.


Due to the production method which is not dependent on a specific shape, these cranked handles can be produced as specials at a competitive price.

TECHNICAL INFORMATION

- Cross holes GN 110 (see page A17)
- ISO-Fundamental Tolerances (see page A21)

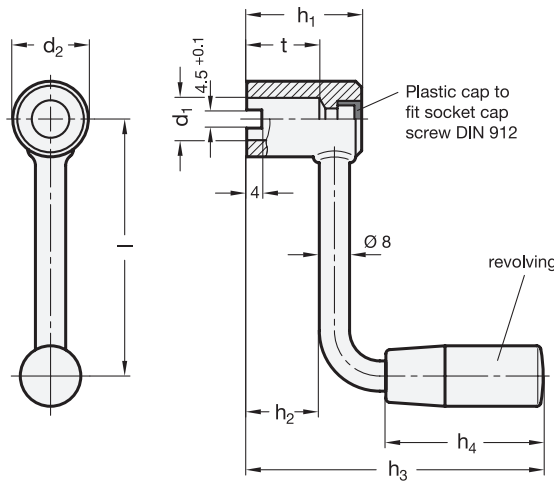

Mounting information



GN 369

Description	l	d1 H9	d2	h1	h2 ≈	h3 ≈	h4 ≈	t +0.5	Ø Handle	For screws DIN 912	⚖
GN 369-63-B10-A	63	B 10	18	28	18	74	40	18	18	M5	88
GN 369-63-B10-N	63	B 10	18	28	18	74	40	18	18	M5	87
GN 369-80-B10-A	80	B 10	18	28	18	74	40	18	18	M5	94
GN 369-80-B10-N	80	B 10	18	28	18	74	40	18	18	M5	93
GN 369-100-B12-A	100	B 12	20	30	20	88	50	20	21	M6	122
GN 369-100-B12-N	100	B 12	20	30	20	88	50	20	21	M6	121
GN 369-125-B12-A	125	B 12	20	30	20	88	50	20	21	M6	135
GN 369-125-B12-N	125	B 12	20	30	20	88	50	20	21	M6	131