

Positioning elements

with threaded stud

SPECIFICATION

Types


- Type **B**: Smooth contact face
- Type **K**: Spherical contact face
- Type **R**: Serrated contact face

Steel


- case hardened
- blackened

INFORMATION

Positioning elements GN 409.1 with threaded stud are designed for use as locating plungers, stops and thrust blocks.

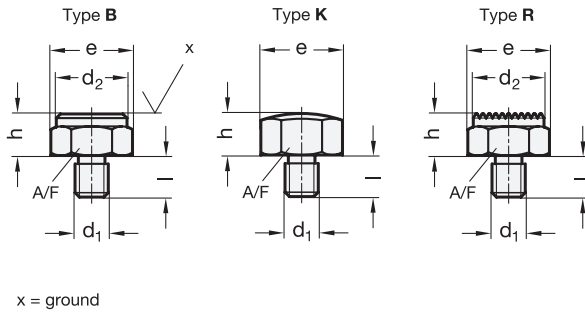

Application example

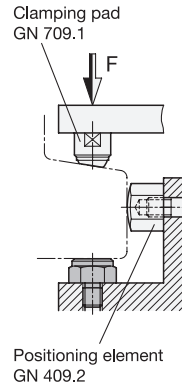

GN 409.1

Description	h ±0.01	h ±0.1	d1	d2	l	A/F	e	△
GN 409.1-10-M8-B	10	-	M 8	17	10	17	19.4	21
GN 409.1-10-M10-B	10	-	M 10	19	12	19	21.9	28
GN 409.1-10-M12-B	10	-	M 12	22	14	22	25.2	40
GN 409.1-15-M10-B	15	-	M 10	19	12	19	21.9	40
GN 409.1-15-M12-B	15	-	M 12	22	14	22	25.2	56
GN 409.1-15-M16-B	15	-	M 16	30	19	30	33	110
GN 409.1-20-M16-B	20	-	M 16	30	19	30	33	140
GN 409.1-10-M8-K	-	10	M 8	-	10	17	19.4	20
GN 409.1-10-M10-K	-	10	M 10	-	12	19	21.9	27
GN 409.1-10-M12-K	-	10	M 12	-	14	22	25.2	37
GN 409.1-15-M10-K	-	15	M 10	-	12	19	21.9	40
GN 409.1-15-M12-K	-	15	M 12	-	14	22	25.2	54
GN 409.1-15-M16-K	-	15	M 16	-	19	30	33	105
GN 409.1-20-M16-K	-	20	M 16	-	19	30	33	135
GN 409.1-10-M8-R	-	10	M 8	17	10	17	19.4	20
GN 409.1-10-M10-R	-	10	M 10	19	12	19	21.9	26
GN 409.1-10-M12-R	-	10	M 12	22	14	22	25.2	38
GN 409.1-15-M10-R	-	15	M 10	19	12	19	21.9	39
GN 409.1-15-M12-R	-	15	M 12	22	14	22	25.2	54
GN 409.1-15-M16-R	-	15	M 16	30	19	30	33	106
GN 409.1-20-M16-R	-	20	M 16	30	19	30	33	136