

Stainless Steel-Levelling feet

with rubber underlay, vulcanized

SPECIFICATION

- Stainless Steel AISI 304
- Rubber underlay
- Acrylonitrile butadiene rubber (NBR)
- vulcanized
  - black
  - temperature resistant up to 120 °C
  - Hardness Shore A 70

INFORMATION

GN 439.5 levelling feet are used for installing smaller machines, systems or devices.

Thanks to the rubber underlay, they have a damping, noise-reducing effect and prevent surface damage. They are also designed such that the threaded spindle can absorb compressive forces. This is necessary because the retaining washer is not evenly supported during leveling.


Thanks to the stable rivet connection between the threaded spindle and the retaining washer, the introduced forces can be reliably transmitted to the rubber underlay.

TECHNICAL INFORMATION

- Strength values of screws (see page A30)
- Elastomer characteristics (see page A32)
- Stainless Steel characteristics (see page )

ON REQUEST

- other spindle diameters and lengths

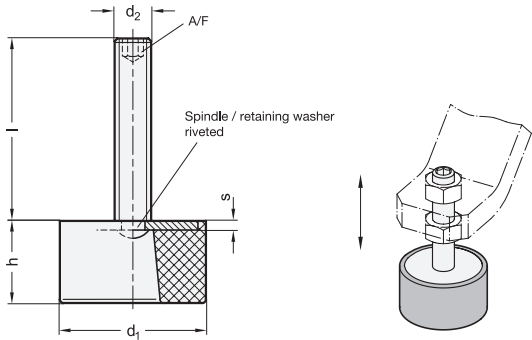

GN 439.5

STAINLESS STEEL

| Description           | d1 | d2   | l  | h  | s   | A/F | Static load<br>in N ≈ | ⚖   |
|-----------------------|----|------|----|----|-----|-----|-----------------------|-----|
| GN 439.5-19-M6-30-70  | 19 | M 6  | 30 | 14 | 1.5 | 3   | 240                   | 25  |
| GN 439.5-19-M6-45-70  | 19 | M 6  | 45 | 14 | 1.5 | 3   | 240                   | 30  |
| GN 439.5-25-M6-30-70  | 25 | M 6  | 30 | 16 | 1.5 | 3   | 540                   | 32  |
| GN 439.5-25-M6-45-70  | 25 | M 6  | 45 | 16 | 1.5 | 3   | 540                   | 35  |
| GN 439.5-32-M8-40-70  | 32 | M 8  | 40 | 18 | 2   | 4   | 840                   | 38  |
| GN 439.5-32-M8-65-70  | 32 | M 8  | 65 | 18 | 2   | 4   | 840                   | 45  |
| GN 439.5-38-M8-40-70  | 38 | M 8  | 40 | 20 | 2   | 4   | 920                   | 54  |
| GN 439.5-38-M8-65-70  | 38 | M 8  | 65 | 20 | 2   | 4   | 920                   | 59  |
| GN 439.5-50-M10-45-70 | 50 | M 10 | 45 | 22 | 2.5 | 5   | 2500                  | 100 |
| GN 439.5-50-M10-70-70 | 50 | M 10 | 70 | 22 | 2.5 | 5   | 2500                  | 112 |
| GN 439.5-64-M10-45-70 | 64 | M 10 | 45 | 26 | 2.5 | 5   | 3700                  | 178 |
| GN 439.5-64-M10-70-70 | 64 | M 10 | 70 | 26 | 2.5 | 5   | 3700                  | 190 |

