

Cabinet U-Handles

with Elastic TPU Sheathing,
Handle Core Stainless Steel or Aluminum

SPECIFICATION

Sheathing

Thermoplastic polyurethane (TPU)

- Black, textured matte finish
- Elastic, 65±5 Shore A
- Operating temperature up to 70 °C
- Abrasion-resistant
- Insulating
- Weather-proof

Handle core

- Stainless steel AISI 303
Round (for size b = 25)
- Aluminum
Elliptical (for size b = 35)



INFORMATION

The shock absorbing casing of the GN 564 cabinet U-handles made of thermoplastic polyurethane (TPU) offers protection from injuries, while its elliptical shape gives it a nice hold.


The stainless steel core and the aluminum core guarantee a high basic durability of the handle.

ON REQUEST

- Other colors

TECHNICAL INFORMATION

- Load Rating Information (see page A35)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

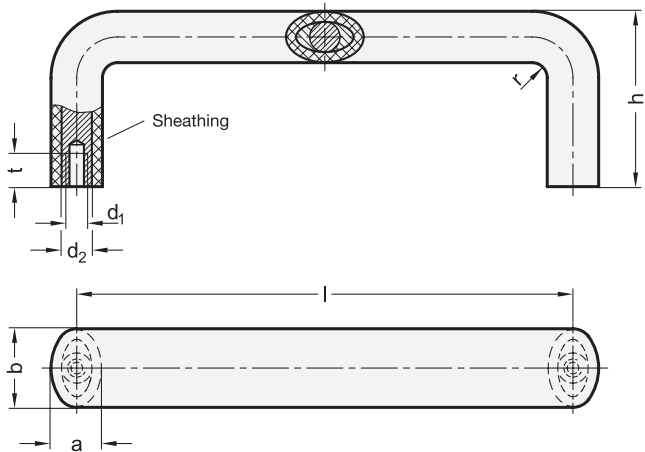

GN 564

Description	b	l ±0.25	a	d ₁	d ₂	h	r	t min.	⚖
GN 564-25-112	25	112	16	M 6	10	50	5	10	154
GN 564-25-128	25	128	16	M 6	10	54	7	10	172
GN 564-25-160	25	160	16	M 6	10	54	9	10	199
GN 564-25-192	25	192	16	M 6	10	54	9	10	227
GN 564-35-160	35	160	25	M 8	17	68	12.5	12	328
GN 564-35-192	35	192	25	M 8	17	68	12.5	12	370
GN 564-35-300	35	300	25	M 8	17	68	12.5	12	513