

Tubular arch handles

Tube Aluminium or Stainless Steel

SPECIFICATION

Handle tube \varnothing 30 x 1.5
Aluminium / Stainless Steel

Handle shanks
Aluminium, plastic coated

Cover caps
Plastic (Polyamide PA)

- glass fibre reinforced
- temperature resistant up to 100 °C

Tube / Handle shanks Aluminium **SW**
plastic coated
black, RAL 9005, textured finish
Cover caps, black, matt

Tube Aluminium **EL**
anodized, natural colour
Handle shanks
black, RAL 9005, textured finish
Cover caps, black, matt

Tube Aluminium **ES**
anodized, natural colour
Handle shanks
silver RAL 9006, textured finish
Cover caps, light grey, matt

Tube Stainless Steel **NG**
AISI 304
ground, matt shiny finish
Handle shanks
black, RAL 9005, textured finish
Cover caps, black, matt




INFORMATION

With their curved type, GN 666.4 tubular arch handles highlight modern machine design.

The production method used allows special solutions to be realised, e. g. with other radii of curvature or other leg heights.

TECHNICAL INFORMATION

- Load rating information (see page A35)

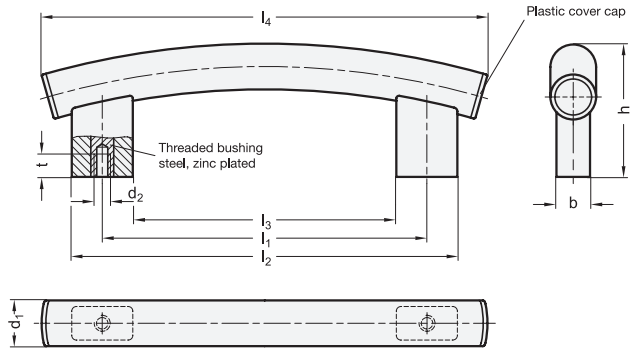

* Complete with Finish of the Tubular arch handles (SW, EL, ES or NG)

SW	EL	ES	NG
black	anodized, black	anodized, light grey	ground, black

GN 666.4

Description	d1	d2	l1 ±1	b	h	l2	l3	l4	t min.	⚖
GN 666.4-30-M6-400-*	30	M 6	400	22	90	440	360	480	15	360
GN 666.4-30-M8-400-*	30	M 8	400	22	90	440	360	480	15	340
GN 666.4-30-M6-500-*	30	M 6	500	22	94	540	460	580	15	377
GN 666.4-30-M8-500-*	30	M 8	500	22	94	540	460	580	15	362
GN 666.4-30-M6-600-*	30	M 6	600	22	98	640	560	680	15	394
GN 666.4-30-M8-600-*	30	M 8	600	22	98	640	560	680	15	384

