

Tubular Handles

Tube Aluminum / Stainless Steel, Handle Legs Plastic

SPECIFICATION

Handle tube

Wall thickness 1,5 mm

- Aluminum
 - Powder coated
 - Black, RAL 9005, textured finish **SW**
 - Handle legs / Covers, black, matte finish
 - Anodized, natural color **EL**
 - Handle legs / Covers, black, matte finish
 - Anodized, natural color **ELG**
 - Handle legs / Covers, light gray, matte finish
- Stainless steel AISI 304
- Ground, matte shiny finish **NG**
- Handle legs / Covers, black, matte finish

Handle legs

Plastic, Polyamide (PA)

- Glass fiber reinforced
- Operating temperature up to 100 °C
- Threaded bushing steel, zinc plated

Covers

Plastic, thermoplastic elastomer (TPE)




TECHNICAL INFORMATION

- Load Rating Information (see page A35)
- Plastic Characteristics (see page A2)
- Stainless Steel Characteristics (see page A26)

INFORMATION

Owing to their large range of variants and their classic design, tubular handles GN 666 are the perfect choice for many applications.

With the modular structure, special lengths are available even in comparatively small unit quantities. Large handle lengths can be supported by additional handle legs.

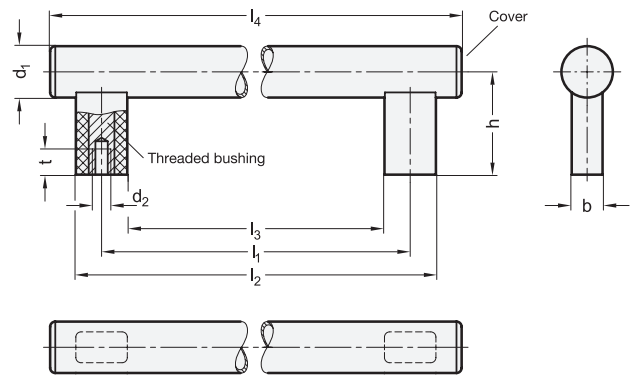

GN 666-SW

Description	d_1	d_2	$l_1 \pm 0.5$	b	h	l_2	l_3	l_4	$t \text{ min.}$	Δ
GN 666-30-M6-200-SW	30	M 6	200	18	60	230	170	265	12	220
GN 666-30-M6-250-SW	30	M 6	250	18	60	280	220	315	12	230
GN 666-30-M6-300-SW	30	M 6	300	18	60	330	270	365	12	265
GN 666-30-M6-350-SW	30	M 6	350	18	60	380	320	415	12	280
GN 666-30-M6-400-SW	30	M 6	400	18	60	430	370	465	12	300
GN 666-30-M6-500-SW	30	M 6	500	18	60	530	470	565	12	330
GN 666-30-M6-600-SW	30	M 6	600	18	60	630	570	665	12	365
GN 666-30-M8-200-SW	30	M 8	200	18	60	230	170	265	15	230
GN 666-30-M8-250-SW	30	M 8	250	18	60	280	220	315	15	240
GN 666-30-M8-300-SW	30	M 8	300	18	60	330	270	365	15	266
GN 666-30-M8-350-SW	30	M 8	350	18	60	380	320	415	15	280
GN 666-30-M8-400-SW	30	M 8	400	18	60	430	370	465	15	320
GN 666-30-M8-500-SW	30	M 8	500	18	60	530	470	565	15	340
GN 666-30-M8-600-SW	30	M 8	600	18	60	630	570	665	15	370

GN 666-EL

Description	d1	d2	l1 ±0.5	b	h	l2	l3	l4	t min.	
GN 666-30-M6-200-EL	30	M 6	200	18	60	230	170	265	12	220
GN 666-30-M6-250-EL	30	M 6	250	18	60	280	220	315	12	230
GN 666-30-M6-300-EL	30	M 6	300	18	60	330	270	365	12	265
GN 666-30-M6-350-EL	30	M 6	350	18	60	380	320	415	12	280
GN 666-30-M6-400-EL	30	M 6	400	18	60	430	370	465	12	300
GN 666-30-M6-500-EL	30	M 6	500	18	60	530	470	565	12	330
GN 666-30-M6-600-EL	30	M 6	600	18	60	630	570	665	12	365
GN 666-30-M8-200-EL	30	M 8	200	18	60	230	170	265	15	230
GN 666-30-M8-250-EL	30	M 8	250	18	60	280	220	315	15	240
GN 666-30-M8-300-EL	30	M 8	300	18	60	330	270	365	15	266
GN 666-30-M8-350-EL	30	M 8	350	18	60	380	320	415	15	280
GN 666-30-M8-400-EL	30	M 8	400	18	60	430	370	465	15	320
GN 666-30-M8-500-EL	30	M 8	500	18	60	530	470	565	15	340
GN 666-30-M8-600-EL	30	M 8	600	18	60	630	570	665	15	370

GN 666-ELG

Description	d1	d2	l1 ±0.5	b	h	l2	l3	l4	t min.	
GN 666-30-M6-200-ELG	30	M 6	200	18	60	230	170	265	12	220
GN 666-30-M6-250-ELG	30	M 6	250	18	60	280	220	315	12	230
GN 666-30-M6-300-ELG	30	M 6	300	18	60	330	270	365	12	265
GN 666-30-M6-350-ELG	30	M 6	350	18	60	380	320	415	12	280
GN 666-30-M6-400-ELG	30	M 6	400	18	60	430	370	465	12	300
GN 666-30-M6-500-ELG	30	M 6	500	18	60	530	470	565	12	330
GN 666-30-M6-600-ELG	30	M 6	600	18	60	630	570	665	12	365
GN 666-30-M8-200-ELG	30	M 8	200	18	60	230	170	265	15	230
GN 666-30-M8-250-ELG	30	M 8	250	18	60	280	220	315	15	240
GN 666-30-M8-300-ELG	30	M 8	300	18	60	330	270	365	15	266
GN 666-30-M8-350-ELG	30	M 8	350	18	60	380	320	415	15	280
GN 666-30-M8-400-ELG	30	M 8	400	18	60	430	370	465	15	320
GN 666-30-M8-500-ELG	30	M 8	500	18	60	530	470	565	15	340
GN 666-30-M8-600-ELG	30	M 8	600	18	60	630	570	665	15	370

GN 666-NG

STAINLESS STEEL

Description	d1	d2	l1 ±0.5	b	h	l2	l3	l4	t min.	
GN 666-30-M6-200-NG	30	M 6	200	18	60	230	170	265	12	373
GN 666-30-M6-250-NG	30	M 6	250	18	60	280	220	315	12	437
GN 666-30-M6-300-NG	30	M 6	300	18	60	330	270	365	12	462
GN 666-30-M6-350-NG	30	M 6	350	18	60	380	320	415	12	480
GN 666-30-M6-400-NG	30	M 6	400	18	60	430	370	465	12	650
GN 666-30-M6-500-NG	30	M 6	500	18	60	530	470	565	12	674
GN 666-30-M6-600-NG	30	M 6	600	18	60	630	570	665	12	800
GN 666-30-M8-200-NG	30	M 8	200	18	60	230	170	265	15	350
GN 666-30-M8-250-NG	30	M 8	250	18	60	280	220	315	15	410
GN 666-30-M8-300-NG	30	M 8	300	18	60	330	270	365	15	445
GN 666-30-M8-350-NG	30	M 8	350	18	60	380	320	415	15	534
GN 666-30-M8-400-NG	30	M 8	400	18	60	430	370	465	15	600
GN 666-30-M8-500-NG	30	M 8	500	18	60	530	470	565	15	700
GN 666-30-M8-600-NG	30	M 8	600	18	60	630	570	665	15	820