

Holding Disks

Stainless Steel, with Threaded Stud, Hygienic Design

SPECIFICATION

Type

- Type **A**: Flat locating surface

Stainless steel AISI 318LN

Matte finish ($Ra < 0.8 \mu m$) **MT**

Sealing ring

- H-NBR **H**

Temperature resistant -25 °C to +150 °C


- EPDM **E**

Temperature resistant -40 °C to +120 °C

- Blue

- Hardness 85 ±5 Shore A

- FDA compliant

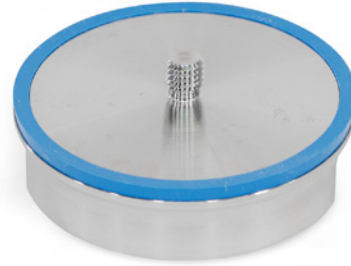

INFORMATION

Holding disks GN 7080 are used as counterparts for retaining magnets when these are used in combination with non-magnetic materials or when the holding force needs to be increased due to thin material.

They are intended for use in hygiene areas. The sealed screw-on surface enables mounting without dead spaces; the impervious geometry in combination with the high quality finish prevents dirt from accumulating and facilitates cleaning.

The holding disks can also be used in particularly aggressive environments thanks to the material used.)

ACCESSORY

- Sealing Rings GN 7600 (see page)




- Nuts GN 1580 (see page)

ON REQUEST

- With FKM sealing ring (fluoro-elastomer) **F**

TECHNICAL INFORMATION

- Plastic Characteristics (see page A2)

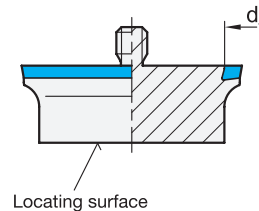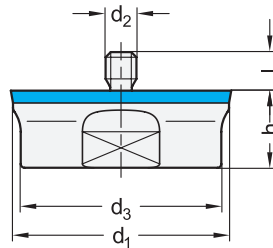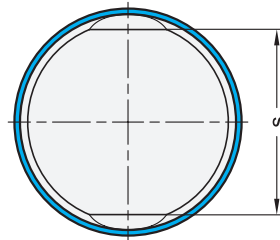


GN 7080

STAINLESS STEEL

Description	d1	d2	d3	d4	h	Length l	s	⚖
GN 7080-28-M4-A-MT-H	28	M 4	26	24	10	5	24	41
GN 7080-28-M4-A-MT-E	28	M 4	26	24	10	5	24	41
GN 7080-42-M5-A-MT-H	42	M 5	40	38	11	5	38	108
GN 7080-42-M5-A-MT-E	42	M 5	40	38	11	5	38	108


Assembly Instructions GN 5080 / GN 5090 / GN 7080 / GN 7090

Retaining magnet with holding disks

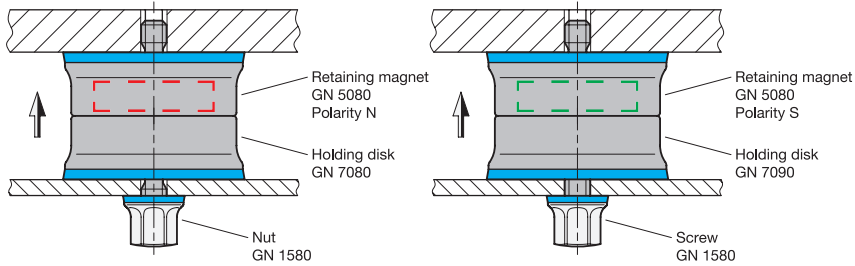


A normal holding force is achieved by combining retaining magnets with holding disks. Retaining magnets with north or south poles on the holding surface can be used equally.

Two retaining magnets with opposite polarity

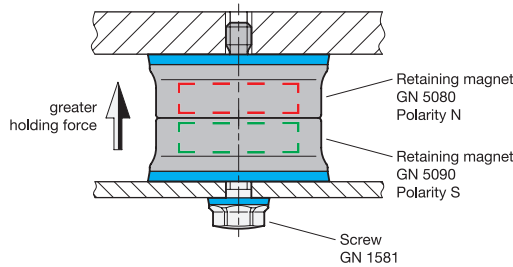

If two retaining magnets with opposite polarity are combined, an increased holding force is achieved.

Two retaining magnets with the same polarity

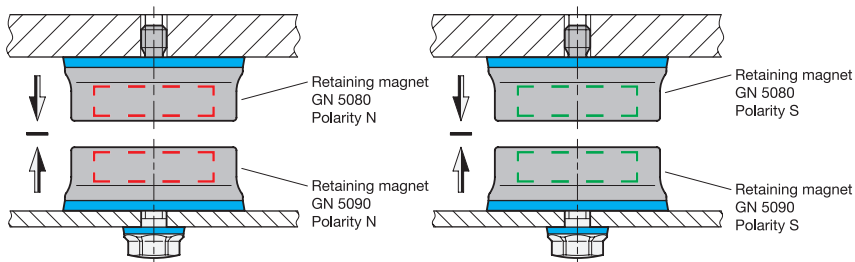

Combining two retaining magnets with the same polarity creates a repelling force.



Magnets 18