

Control Knobs

Aluminum

SPECIFICATION

Types

- Type **A**: With arrow
- Type **B**: Neutral, without indicator point or scale
- Type **S**: With scale 0...9, 20 graduations

Identification no.

- No. **1**: With grub screw
- No. **2**: With collet

Knob

Aluminum

- Anodized, black
- Arrow for type A
White, laser-engraved
- Scale for type S
White, laser-engraved

Cover

Plastic, light gray

Collet / Hex nut

Brass

Grub screw DIN 916

Stainless steel
with internal hex and serrated point



INFORMATION

The light gray cover of the control knobs GN 726.1 shrouds the fixing components as well as the shaft ends. The cover also lends itself for a logo or other symbols.

The collet version permits a simple adjustment of the types with scale or arrow.

Scale and arrow on the control knobs are indelibly marked and easily legible since the engraved „aluminum colored“ numbers contrast with the black anodized surface.

Besides the standard scale (type S) the control knobs can be supplied with any type of graduation.

Regarding design, numbering run, and numbering sequence of the scale please see the layout for scale knobs on the order sheet "How to Order Graduations" (see page 594).

ACCESSORY


- GN 826 Clamping Elements (for Adjustable Spindles) (see page 960)


ON REQUEST

- Special graduations (see „How to Order Graduations“)

TECHNICAL INFORMATION

- How to Order Graduations (see page 594)
- ISO Fundamental Tolerances (see page A21)

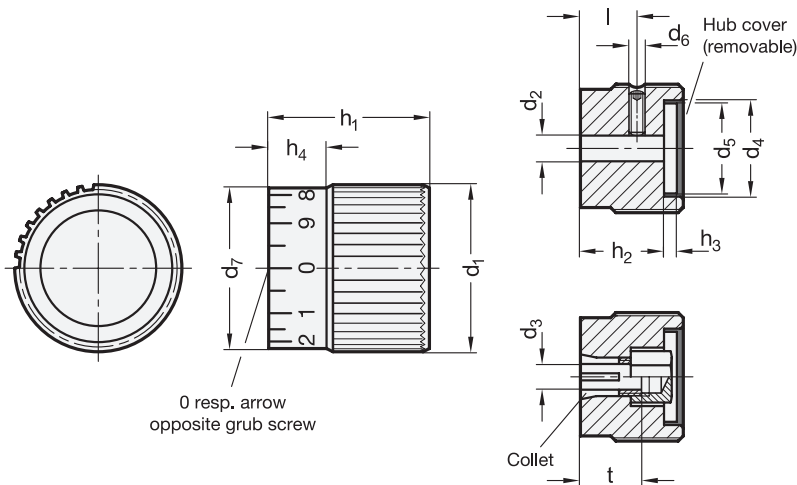

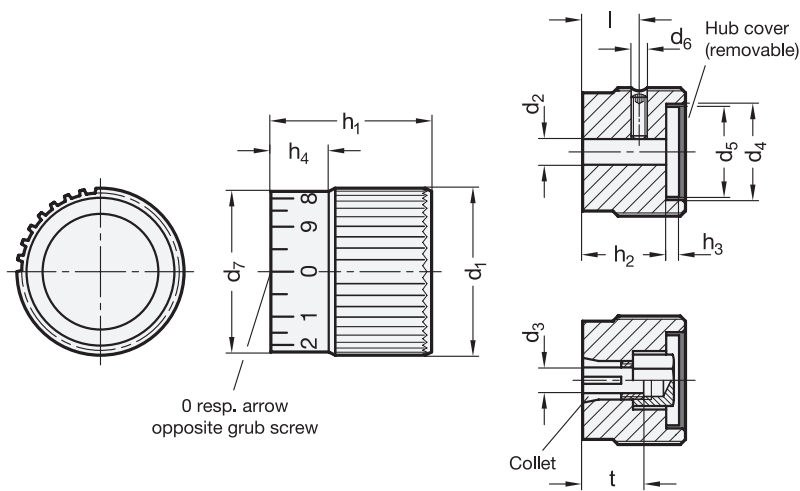

GN 726.1-A

Description	d1	d2 H8 Bore	d3 Collet	d4	d5	d6	d7	h1	h2	h3	h4	Length l	t	
GN 726.1-22-B5-A-1	22	B 5	-	16	14	M 4	20	22	16	4.3	8	12.5	-	17
GN 726.1-27-Z6-A-2	27	-	Z 6	20	18	M 4	25	26	20	4.3	9	14	14	37
GN 726.1-27-B6-A-1	27	B 6	-	20	18	M 4	25	26	20	4.3	9	14	14	32
GN 726.1-34-Z8-A-2	34	-	Z 8	25	23	M 5	32	30	24	4.2	10	15	17	65
GN 726.1-34-B6-A-1	34	B 6	-	25	23	M 5	32	30	24	4.2	10	15	17	59
GN 726.1-34-B8-A-1	34	B 8	-	25	23	M 5	32	30	24	4.2	10	15	17	58
GN 726.1-42-Z10-A-2	42	-	Z 10	32	30	M 5	40	34	28	4	11	16	20	112
GN 726.1-42-B8-A-1	42	B 8	-	32	30	M 5	40	34	28	4	11	16	20	102
GN 726.1-42-B10-A-1	42	B 10	-	32	30	M 5	40	34	28	4	11	16	20	103

GN 726.1-B

Description	d1	d2 H8 Bore	d3 Collet	d4	d5	d6	d7	h1	h2	h3	h4	Length l	t	
GN 726.1-22-B5-B-1	22	B 5	-	16	14	M 4	20	22	16	4.3	8	12.5	-	17
GN 726.1-27-Z6-B-2	27	-	Z 6	20	18	M 4	25	26	20	4.3	9	14	14	37
GN 726.1-27-B6-B-1	27	B 6	-	20	18	M 4	25	26	20	4.3	9	14	14	32
GN 726.1-34-Z8-B-2	34	-	Z 8	25	23	M 5	32	30	24	4.2	10	15	17	65
GN 726.1-34-B6-B-1	34	B 6	-	25	23	M 5	32	30	24	4.2	10	15	17	59
GN 726.1-34-B8-B-1	34	B 8	-	25	23	M 5	32	30	24	4.2	10	15	17	58
GN 726.1-42-Z10-B-2	42	-	Z 10	32	30	M 5	40	34	28	4	11	16	20	112
GN 726.1-42-B8-B-1	42	B 8	-	32	30	M 5	40	34	28	4	11	16	20	102
GN 726.1-42-B10-B-1	42	B 10	-	32	30	M 5	40	34	28	4	11	16	20	103

GN 726.1-S

Description	d1	d2 H8 Bore	d3 Collet	d4	d5	d6	d7	h1	h2	h3	h4	Length l	t	
GN 726.1-22-B5-S-1	22	B 5	-	16	14	M 4	20	22	16	4.3	8	12.5	-	17
GN 726.1-27-Z6-S-2	27	-	Z 6	20	18	M 4	25	26	20	4.3	9	14	14	37
GN 726.1-27-B6-S-1	27	B 6	-	20	18	M 4	25	26	20	4.3	9	14	14	32
GN 726.1-34-Z8-S-2	34	-	Z 8	25	23	M 5	32	30	24	4.2	10	15	17	65
GN 726.1-34-B6-S-1	34	B 6	-	25	23	M 5	32	30	24	4.2	10	15	17	59
GN 726.1-34-B8-S-1	34	B 8	-	25	23	M 5	32	30	24	4.2	10	15	17	58
GN 726.1-42-Z10-S-2	42	-	Z 10	32	30	M 5	40	34	28	4	11	16	20	112
GN 726.1-42-B8-S-1	42	B 8	-	32	30	M 5	40	34	28	4	11	16	20	102
GN 726.1-42-B10-S-1	42	B 10	-	32	30	M 5	40	34	28	4	11	16	20	103



Control elements