

Control knobs

Aluminium

SPECIFICATION

Aluminium
anodized, black

Indexing line
white, engraved with laser precision

Stainless Steel-Grub screw DIN 916
with internal hexagon and serrated point




INFORMATION

Control knobs GN 729 are usually selected for applications which require a limited movement within 180°.


With the aid of limiting pins which protrude into the circular groove the angle of rotation can be restricted. The bore d_4 is for a spring plunger GN 614 (see page 847) to act as a simple detent. The indexing line is indelible and visible from two sides.

TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page A21)



Indexing line
placed opposite
grub screw

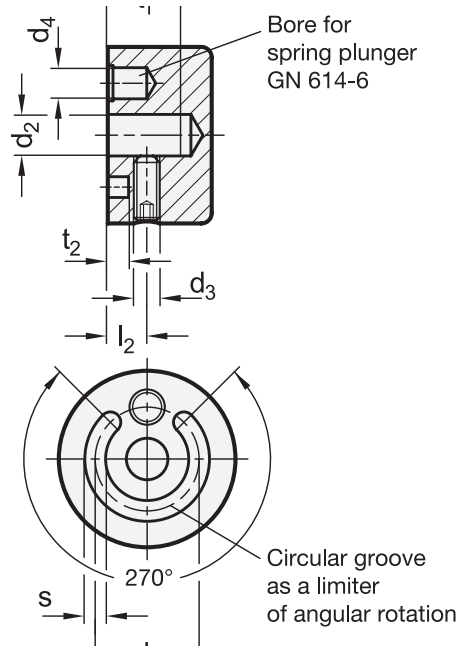

GN 729

Description	d_1	d_2 H8	b	d_3	d_4	d_5	l_1	l_2	t_1 min.	$t_2 + 0.2$	s $+0.3/+0.1$	Δ
GN 729-34-B6	34	B 6	28	M 5	6	20	20	7.5	14	4	4	43
GN 729-34-B8	34	B 8	28	M 5	6	20	20	7.5	14	4	4	41
GN 729-42-B8	42	B 8	35	M 5	6	30	22	7.5	16	4	4	72
GN 729-42-B10	42	B 10	35	M 5	6	30	22	7.5	16	4	4	69