

Bearing blocks

for Stainless Steel-Adjusting screws GN 827

SPECIFICATION

TYPES

- Type **A**: with thread, mounting from above
- Type **UA**: with groove, mounting from above
- Type **UB**: with groove, mounting from the front

Aluminum **AM**

matte ground

Reference line

laser-engraved, black discharged

INFORMATION

Bearing blocks GN 828 are used in combination with Stainless Steel-Adjusting screws GN 827 (see page) for simple adjustment and positioning tasks.

For processing and assembly equipment on which attachments and mechanisms must be regularly exchanged, particularly simple adjustments can be achieved by combining adjusting screws GN 827 (see page) knurled nuts GN 827.1 (see page) and bearing blocks GN 828 (see page) of the types UA and UB to ensure that settings are retained even between uses.




On the opposing part, type A or threading already present in the mounting plate can be used.

ACCESSORY

- Stainless Steel-Adjusting screws GN 827 (see page)
- Stainless Steel-Knurled nuts GN 827.1 (see page)

TECHNICAL INFORMATION

- ISO-Fundamental Tolerances (see page)

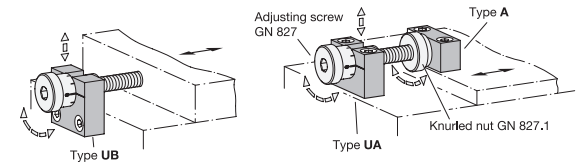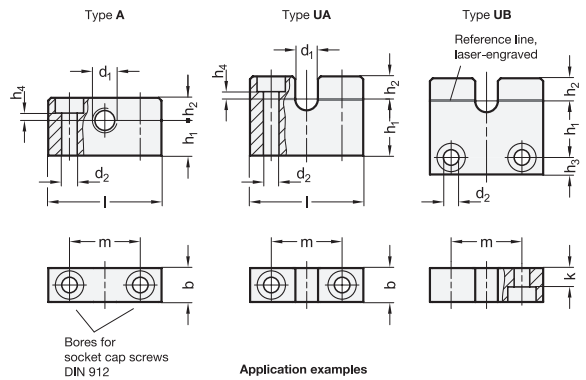

GN 828

Description	d1 +0.6/+0.4		h1	h1	b	d2	h2	h3	h4	k	l	m	⚖
	Type UA/UB	Type UA											
GN 828-6-UA-10-AM	6	10	-	10	4.5	6	-	1.6	-	35	22	13	
GN 828-6-UA-15-AM	6	15	-	10	4.5	6	-	1.6	-	35	22	17	
GN 828-6-UA-25-AM	6	25	-	10	4.5	6	-	1.6	-	35	22	26	
GN 828-8-UA-12-AM	8	12	-	12	5.5	8	-	2.6	-	40	25	20	
GN 828-8-UA-20-AM	8	20	-	12	5.5	8	-	2.6	-	40	25	29	
GN 828-8-UA-30-AM	8	30	-	12	5.5	8	-	2.6	-	40	25	41	
GN 828-10-UA-15-AM	10	15	-	15	6.5	10	-	3.6	-	45	30	34	
GN 828-10-UA-20-AM	10	20	-	15	6.5	10	-	3.6	-	45	30	42	
GN 828-10-UA-30-AM	10	30	-	15	6.5	10	-	3.6	-	45	30	59	
GN 828-6-UB-10-AM	6	-	10	10	4.5	6	5	-	5.6	35	22	18	
GN 828-6-UB-15-AM	6	-	15	10	4.5	6	5	-	5.6	35	22	23	
GN 828-6-UB-20-AM	6	-	20	10	4.5	6	5	-	5.6	35	22	28	
GN 828-8-UB-15-AM	8	-	15	12	5.5	8	6	-	6.6	40	25	33	
GN 828-8-UB-20-AM	8	-	20	12	5.5	8	6	-	6.6	40	25	39	
GN 828-8-UB-30-AM	8	-	30	12	5.5	8	6	-	6.6	40	25	52	
GN 828-10-UB-20-AM	10	-	20	15	6.5	10	7.5	-	8.6	45	30	59	
GN 828-10-UB-25-AM	10	-	25	15	6.5	10	7.5	-	8.6	45	30	68	
GN 828-10-UB-35-AM	10	-	35	15	6.5	10	7.5	-	8.6	45	30	86	

GN 828

Description	d1		h1	b	h11	d2	h2	h4	l	m	⚖
	Type A	Type A									
GN 828-M6x1-A-5-AM	M6x1	5	10	4.5	6	1.6	35	22	8		
GN 828-M6x1-A-10-AM	M6x1	10	10	4.5	6	1.6	35	22	12		
GN 828-M6x1-A-20-AM	M6x1	20	10	4.5	6	1.6	35	22	21		
GN 828-M8x1-A-8-AM	M8x1	8	12	5.5	8	2.6	40	25	16		
GN 828-M8x1-A-15-AM	M8x1	15	12	5.5	8	2.6	40	25	24		
GN 828-M8x1-A-20-AM	M8x1	20	12	5.5	8	2.6	40	25	30		
GN 828-M10x1-A-10-AM	M10x1	10	15	6.5	10	3.6	45	30	28		
GN 828-M10x1-A-20-AM	M10x1	20	15	6.5	10	3.6	45	30	44		
GN 828-M10x1-A-30-AM	M10x1	30	15	6.5	10	3.6	45	30	60		