

Toggle clamp spindle assemblies

Steel / Stainless Steel, with swivel plastic thrust pad

SPECIFICATION

Thrust pad
Plastic (Polyacetal POM)
- temperature resistant up to 80 °C
- black, matt

Version in Steel ST

Grub screw
Steel
- Tensile strength class 5.8
- blackened

Hexagon nuts ISO 4032
Steel zinc plated, blue passivated

Version in Stainless Steel NI


Grub screw
Stainless Steel AISI 303
Hexagon nuts ISO 4032
Stainless Steel AISI 303

INFORMATION

The ball end of the grub screw can be hit easily into the thrust pad and removed.
The two hexagon nuts are included parts of the order.

TECHNICAL INFORMATION

- Stainless Steel characteristics (see page A26)
- Strength values of screws (see page A20)

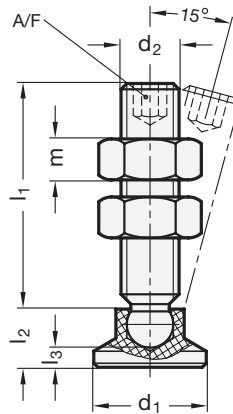

* Complete with material index of the toggle clamp spindle assemblies

ST Steel
NI Stainless Steel

GN 903

STAINLESS STEEL

Description	d1	d2	l1	l2	l3 ≈	m	A/F	⚙️
GN 903-15-M6-26-*	15	M 6	26	7.6	3.6	5.2	3	12
GN 903-15-M6-36-*	15	M 6	36	7.6	3.6	5.2	3	15
GN 903-15-M6-46-*	15	M 6	46	7.6	3.6	5.2	3	15
GN 903-15-M8-20-*	15	M 8	20	7.6	2.5	6.8	4	16
GN 903-15-M8-35-*	15	M 8	35	7.6	2.5	6.8	4	21
GN 903-15-M8-45-*	15	M 8	45	7.6	2.5	6.8	4	24
GN 903-15-M8-58-*	15	M 8	58	7.6	2.5	6.8	4	28
GN 903-18-M8-20-*	18	M 8	20	9.2	4.2	6.8	4	19
GN 903-18-M8-35-*	18	M 8	35	9.2	4.2	6.8	4	22
GN 903-18-M8-45-*	18	M 8	45	9.2	4.2	6.8	4	25
GN 903-18-M8-58-*	18	M 8	58	9.2	4.2	6.8	4	29



* Complete with material index of the toggle clamp spindle assemblies

ST **NI**
Steel Stainless Steel

GN 903

STAINLESS STEEL

Description	d1	d2	l1	l2	l3 ≈	m	A/F	⚖
GN 903-18-M10-34-*	18	M 10	34	9.2	3.4	8.4	5	34
GN 903-18-M10-44-*	18	M 10	44	9.2	3.4	8.4	5	40
GN 903-18-M10-57-*	18	M 10	57	9.2	3.4	8.4	5	47
GN 903-18-M10-74-*	18	M 10	74	9.2	3.4	8.4	5	55
GN 903-21-M8-20-*	21	M 8	20	10	5	6.8	4	18
GN 903-21-M8-35-*	21	M 8	35	10	5	6.8	4	21
GN 903-21-M8-45-*	21	M 8	45	10	5	6.8	4	25
GN 903-21-M8-58-*	21	M 8	58	10	5	6.8	4	30
GN 903-21-M10-34-*	21	M 10	34	10	4.3	8.4	5	35
GN 903-21-M10-44-*	21	M 10	44	10	4.3	8.4	5	41
GN 903-21-M10-57-*	21	M 10	57	10	4.3	8.4	5	48
GN 903-21-M10-74-*	21	M 10	74	10	4.3	8.4	5	56
GN 903-21-M12-34-*	21	M 12	34	10	3.4	10.8	6	47
GN 903-21-M12-57-*	21	M 12	57	10	3.4	10.8	6	68
GN 903-21-M12-74-*	21	M 12	74	10	3.4	10.8	6	80
GN 903-21-M12-94-*	21	M 12	94	10	3.4	10.8	6	95
GN 903-25-M8-20-*	25	M 8	20	10.5	5.5	6.8	4	14
GN 903-25-M8-35-*	25	M 8	35	10.5	5.5	6.8	4	18
GN 903-25-M8-45-*	25	M 8	45	10.5	5.5	6.8	4	26
GN 903-25-M8-58-*	25	M 8	58	10.5	5.5	6.8	4	30
GN 903-25-M10-34-*	25	M 10	34	10.5	4.6	8.4	5	37
GN 903-25-M10-44-*	25	M 10	44	10.5	4.6	8.4	5	43
GN 903-25-M10-57-*	25	M 10	57	10.5	4.6	8.4	5	50
GN 903-25-M10-74-*	25	M 10	74	10.5	4.6	8.4	5	58
GN 903-25-M12-34-*	25	M 12	34	10.5	3.6	10.8	6	49
GN 903-25-M12-57-*	25	M 12	57	10.5	3.6	10.8	6	70
GN 903-25-M12-74-*	25	M 12	74	10.5	3.6	10.8	6	82
GN 903-25-M12-94-*	25	M 12	94	10.5	3.6	10.8	6	97
GN 903-32-M8-20-*	32	M 8	20	11	6	6.8	4	16
GN 903-32-M8-35-*	32	M 8	35	11	6	6.8	4	20
GN 903-32-M8-45-*	32	M 8	45	11	6	6.8	4	24
GN 903-32-M8-58-*	32	M 8	58	11	6	6.8	4	28
GN 903-32-M10-34-*	32	M 10	34	11	5	8.4	5	29
GN 903-32-M10-44-*	32	M 10	44	11	5	8.4	5	35
GN 903-32-M10-57-*	32	M 10	57	11	5	8.4	5	45
GN 903-32-M10-74-*	32	M 10	74	11	5	8.4	5	50
GN 903-32-M12-34-*	32	M 12	34	11	4.2	10.8	6	37
GN 903-32-M12-57-*	32	M 12	57	11	4.2	10.8	6	50
GN 903-32-M12-74-*	32	M 12	74	11	4.2	10.8	6	76
GN 903-32-M12-94-*	32	M 12	94	11	4.2	10.8	6	85
GN 903-40-M8-20-*	40	M 8	20	13	8	6.8	4	21
GN 903-40-M8-35-*	40	M 8	35	13	8	6.8	4	25
GN 903-40-M8-45-*	40	M 8	45	13	8	6.8	4	29
GN 903-40-M8-58-*	40	M 8	58	13	8	6.8	4	32
GN 903-40-M10-34-*	40	M 10	34	13	7	8.4	5	34
GN 903-40-M10-44-*	40	M 10	44	13	7	8.4	5	40
GN 903-40-M10-57-*	40	M 10	57	13	7	8.4	5	47
GN 903-40-M10-74-*	40	M 10	74	13	7	8.4	5	55
GN 903-40-M12-34-*	40	M 12	34	13	6.2	10.8	6	41
GN 903-40-M12-57-*	40	M 12	57	13	6.2	10.8	6	62
GN 903-40-M12-74-*	40	M 12	74	13	6.2	10.8	6	71
GN 903-40-M12-94-*	40	M 12	94	13	6.2	10.8	6	89

Weight type ST

Toggle, power and hook clamps 14