

Twin castors for the general public with steel bracket

Vulcanised rubber coating

COVERING

Grey anti-trace rubber.

WHEEL CENTRE BODY

Polypropylene-based (PP) technopolymer.

ROLLING ACTION

Hub with pass-through hole.

TURNING PLATE BRACKET

Electrolytically zinc-plated steel sheet bracket.

The presence of a double ball race and the direct contact between the plate and the ball race ring with built-in pin ensure excellent manoeuvrability.

FRONT-ACTUATED BRAKE

Total brake that locks rotation of the wheel and the technopolymer bracket.

The optimised dimensions and the retractable pedal ensure minimal space occupied and maximum actuation ease.

STANDARD EXECUTIONS

- **SBL-G:** turning plate bracket, without brake.
- **SBF-G:** turning plate bracket, with brake.
- **CBL-G:** turning plate bracket and threaded centre pin, without brake.
- **CBF-G:** turning plate bracket and threaded centre pin, with brake.


APPLICATIONS

Wheels for the general public with high carrying capacity, excellent smoothness and elasticity features.

ENVIRONMENTAL CONDITIONS

The twin wheels RE.C7-G are suitable for use in humid environments and in the presence of medium-aggressive chemical environments; use in environments with the presence of organic, chlorinated solvents, hydrocarbons and mineral oils is not recommended.



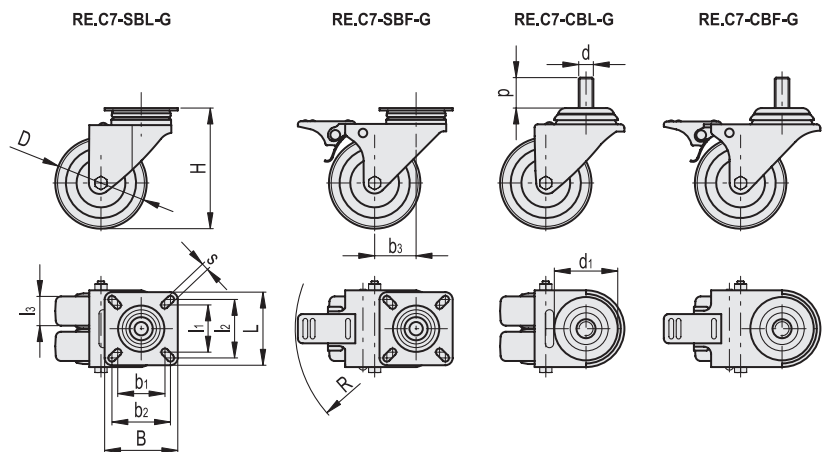

RE.C7-SBL-G

Code	Description	D	H	B	L	b ₁	b ₂	b ₃	l ₁	l ₂	l ₃	s	Dynamic carrying capacity# [N]	⚖
452002	RE.C7-050-SBL-G	50	71	60	60	38.5	48.5	31	38.5	48.5	18	6	600	350
452010	RE.C7-075-SBL-G	75	99	60	60	38.5	48.5	33	38.5	48.5	24	6	800	640

RE.C7-SBF-G

Code	Description	D	H	B	L	R	b ₁	b ₂	b ₃	l ₁	l ₂	l ₃	s	Dynamic carrying capacity# [N]	⚖
452052	RE.C7-050-SBF-G	50	71	60	60	83	38.5	48.5	31	38.5	48.5	18	6	600	400
452050	RE.C7-075-SBF-G	75	99	60	60	97	38.5	48.5	33	38.5	48.5	24	6	800	720

RE.C7-CBL-G

Code	Description	D	H	d	d ₁	b ₃	l ₃	p	Dynamic carrying capacity# [N]	⚖
452152	RE.C7-050-CBL-G	50	71	M10	41	31	18	15	600	300
452160	RE.C7-075-CBL-G	75	99	M12	52	33	24	25	800	500

RE.C7-CBF-G

Code	Description	D	H	R	d	d ₁	b ₃	l ₃	p	Dynamic carrying capacity# [N]	⚖
452202	RE.C7-050-CBF-G	50	71	84	M10	41	31	18	15	600	370
452210	RE.C7-075-CBF-G	75	99	97	M12	52	33	24	25	800	680

For dynamic carrying capacity see Technical data.

