

Wheels for the general public

Vulcanised rubber coating

COVERING

Grey anti-trace rubber.

WHEEL CENTRE BODY

Polypropylene-based (PP) technopolymer, with polyamide thread guards (D = 40 mm) or with metal thread guards (D = 50, 60, 80 mm).

ROLLING ACTION

Hub with pass-through hole.

APPLICATIONS


Wheels for the general public, excellent rolling resistance and elasticity features.

For selection parameters see Technical data

RE.C7 wheels are also supplied with steel sheet bracket RE.C7-C.

ENVIRONMENTAL CONDITIONS

Suitable for use in humid environments and in the presence of medium-aggressive chemical environments; use in environments with the presence of organic, chlorinated solvents, hydrocarbons and mineral oils is not recommended.

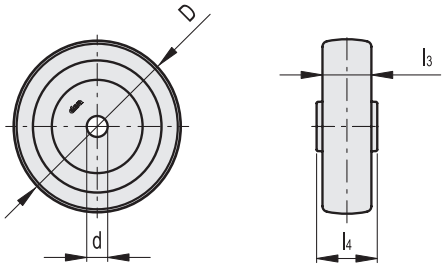

RE.C7

Code	Description	D	d	l ₃	l ₄	Dynamic carrying capacity# [N]	⚖️
452076	RE.C7-040-RBL	40	8	18	22	300	30
452081	RE.C7-050-RBL	50	8	18	22	350	60
452086	RE.C7-060-RBL	60	8	24	29	500	100
452091	RE.C7-080-RBL	80	8	24	29	550	170

For static load, rolling resistance and dynamic carrying capacity see Technical data.