

Plates

Stainless Steel, with Threaded Studs, for Hinges

SPECIFICATION

Plate

Stainless steel AISI 304 **NI**
Matte finish, tumbled **MT**

Threaded studs

Stainless steel AISI 416 / AISI 304CU
Pressed in

INFORMATION

Plates GN 2376 are designed as accessories for multiple families of hinges. They make additional threaded holes, bolts, nuts and washers unnecessary during installation. This eliminates the labor-intensive pre-installation of such parts as well as the need to hold them in place during tightening or loosening.




The plates are fastened from the outside via through-holes in the housing wall or alternatively by welding to the inside of the wall. This results in effective protection against vandalism, and the outsides of the housing remain free of attachments that do not match the design or that should be avoided entirely in the interests of easy cleaning.

ON REQUEST


Other threaded studs
Other plate sizes
Other plate geometries

TECHNICAL INFORMATION

• Stainless Steel Characteristics (see page A26)

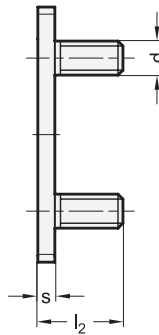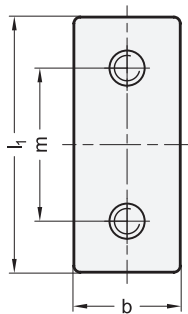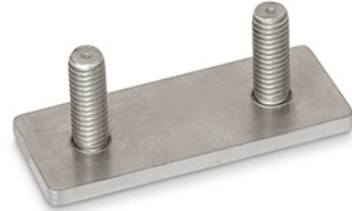

Mounting example

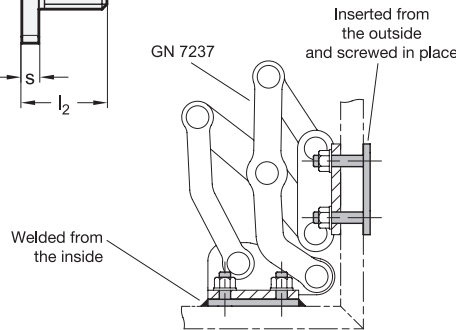

GN 2376

STAINLESS STEEL

Description	l ₁	l ₂	b	d	m	s	Suitable for hinges with hole spacing m	Δ
GN 2376-NI-30-15-MT	30	15	15	M 4	18	3	GN 7231 GN 7233 GN 7237	15
GN 2376-NI-30-25-MT	30	25	15	M 4	18	3	GN 7231 GN 7233 GN 7237	16
GN 2376-NI-40-15-MT	40	15	15	M 5	25	3	GN 235 GN 7231 GN 7233 GN 7237	17
GN 2376-NI-40-25-MT	40	25	15	M 5	25	3	GN 235 GN 7231 GN 7233 GN 7237	19
GN 2376-NI-50-20-MT	50	20	20	M 6	30	3	GN 235 GN 7231 GN 7233 GN 7237	30
GN 2376-NI-50-30-MT	50	30	20	M 6	30	3	GN 235 GN 7231 GN 7233 GN 7237	33
GN 2376-NI-60-20-MT	60	20	25	M 8	36	4	GN 235 GN 7231 GN 7233 GN 7237	46
GN 2376-NI-60-30-MT	60	30	25	M 8	36	4	GN 235 GN 7231 GN 7233 GN 7237	52