

Clamp mountings

Aluminium

SPECIFICATION

Aluminium

- matt, slide ground **MT**
- anodized, black **ELS**

Clamping kits GN 511 (see page 1893)

Zinc die casting

Inserts / Distance bushings
Stainless Steel AISI 303

INFORMATION


The clamp mountings GN 477 have no thread. Fixing or clamping is made via two threads on the attachment side. The bore distance m of the clamp mountings GN 477 is matched with the foot clamp mountings GN 473 (see page 1878) and the flanged bolts GN 480 (see page 1885) as well as retaining magnets GN 51.6 (see page 2032).

TECHNICAL INFORMATION


- Stainless Steel characteristics (see page A26)

ACCESSORY


- Clamping kits GN 511 (see page 1893)

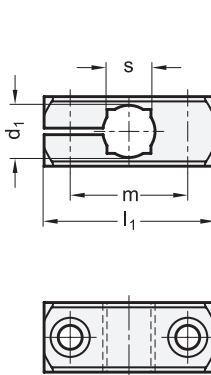


Countersunk for socket cap screw DIN 912



Clamping kit



Application example



Retaining magnet GN 51.6

GN 477

Description	d1 For shaft tolerance h11	k	d2	l1	l2	m	s	Clamping kits for d2	⚖
GN 477-B8-ELS	B 8	14	M 4	31.5	10	22	-	GN 511-M4-20	11
GN 477-B8-MT	B 8	14	M 4	31.5	10	22	-	GN 511-M4-20	11
GN 477-B10-ELS	B 10	16	M 5	38	10.5	27	8	GN 511-M5-25	18
GN 477-B10-MT	B 10	16	M 5	38	10.5	27	8	GN 511-M5-25	17
GN 477-B12-ELS	B 12	16	M 5	38	10.5	27	10	GN 511-M5-25	16
GN 477-B12-MT	B 12	16	M 5	38	10.5	27	10	GN 511-M5-25	16
GN 477-B15-ELS	B 15	20	M 6	45	14	32	12	GN 511-M6-25	31
GN 477-B15-MT	B 15	20	M 6	45	14	32	12	GN 511-M6-25	30
GN 477-B16-ELS	B 16	20	M 6	45	14	32	-	GN 511-M6-25	29
GN 477-B16-MT	B 16	20	M 6	45	14	32	-	GN 511-M6-25	29
GN 477-B20-ELS	B 20	25	M 6	50	19	36	16	GN 511-M6-32	52
GN 477-B20-MT	B 20	25	M 6	50	19	36	16	GN 511-M6-32	52

